



WALL WASHER SERIES


Vorlane, Your Design-Driven Partner of LED Lights.
Top Supply Chain & ISO-Certified Factories.
You Have Vorlane Team in China.




Model:OXQD-013

TECHNICAL PARAMETER

Power: 5-9W/12-15W
 Light source: COB
 Ring color: 12 kinds of sand silver/bright silver/champagne gold/local gold/rose gold/purple gold
 Ring shape: Large circle/medium circle/small circle/ellipse/semicircle
 Voltage: 85-265V
 Beam angle: 15°/24°/36°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W

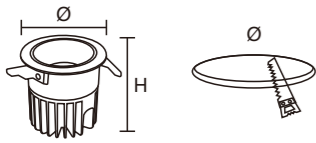

POWER	5-9W	12-15W
SIZE	Ø72*H79mm	Ø92*H93mm
CUT-OUT	Ø65mm	Ø80mm

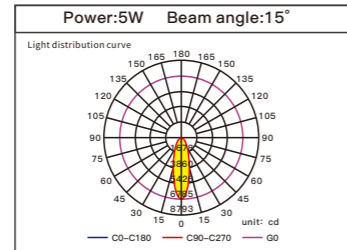

H(m)	EO(x)	Dh/DV_B(m)	S_B(sq.m)	Ear_B(x)
1.0m	4707.85	0.26/0.26	0.2	1278.93
2.0m	1176.96	0.51/0.52	0.3	569.73
3.0m	523.87	0.77/0.78	0.5	253.44
4.0m	294.49	1.03/1.04	0.9	142.68
5.0m	188.15	1.28/1.30	1.3	91.64

Half-peak corner(B):H14.6V14.9
 Effective beam angle(F):H41.9 V42.1




Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.




Model:GXQD-014

TECHNICAL PARAMETER

Power: 3-6W/6-15W/15-25W/15-40W
 Light source: COB
 Ring color: Gun black/chrome/gold
 Ring shape: Small circle/ellipse
 Voltage: 85-265V
 Beam angle: 15°/24°/36°/55°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W

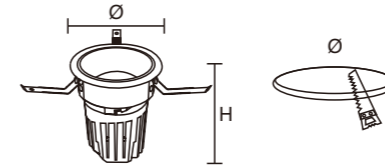


POWER	3-6W	6-15W	15-25W	15-40W
SIZE	Ø62*H70mm	Ø83*H96mm	Ø105*H120mm	Ø143*H160mm
CUT-OUT	Ø55mm	Ø75mm	Ø95mm	Ø135mm

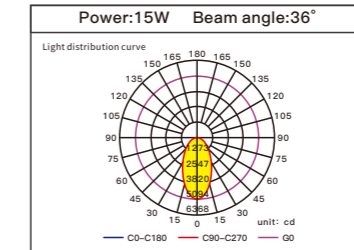

H(m)	EO(x)	Dh/DV_B(m)	S_B(sq.m)	Ear_B(x)
1.0m	5094.85	0.58/0.59	0.3	2142.93
2.0m	1273.96	1.16/1.18	1.1	531.73
3.0m	566.87	1.74/1.77	2.4	236.44
4.0m	318.49	2.32/2.35	4.3	132.68
5.0m	203.15	2.90/2.94	6.7	84.64

Half-peak corner(B):H14.6V14.9
 Effective beam angle(F):H41.9 V42.1

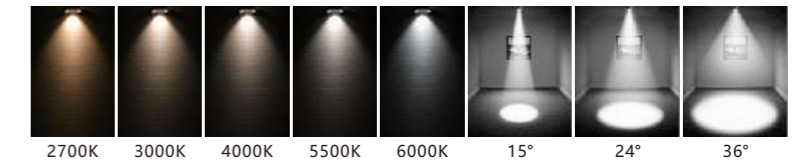


Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.





Model:GXQD-015

TECHNICAL PARAMETER

Power: 10-15W/18-30W
 Light source: COB
 Ring color: Gun black/chrome/gold
 Ring shape: Middle circle/ellipse
 Voltage: 85-265V
 Beam angle: 15°/24°/36°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W

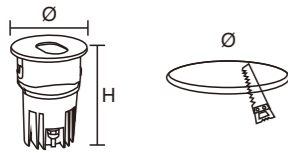


POWER	10-15W	18-30W
SIZE	Ø90*H120mm	Ø120*H150mm
CUT-OUT	Ø75mm	Ø110mm

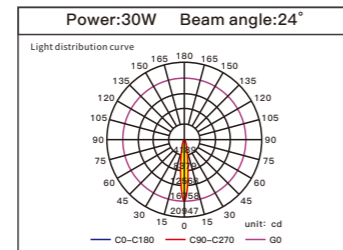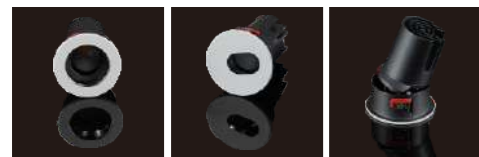

H(m)	EO(x)	Dh/DV_B(m)	S_B(sq.m)	Ear_B(x)
1.0m	16758.85	0.34/0.34	0.1	7486.93
2.0m	4198.96	0.68/0.68	0.4	1871.73
3.0m	1862.87	1.02/1.01	0.8	631.44
4.0m	1047.49	1.36/1.35	1.4	467.68
5.0m	670.15	1.70/1.69	2.3	299.64

Half-peak corner(B):H19.3/V19.2
 Effective beam angle(F):H38.6 V39.3

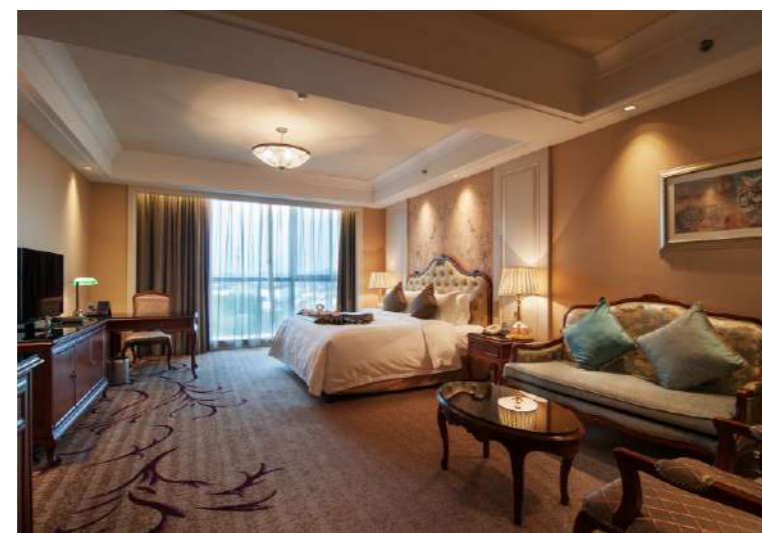


Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.




Model:GXQD-016

TECHNICAL PARAMETER

Power: 5-10W/8-12W
 Light source: COB
 Ring color: Gun black/chrome/gold
 Voltage: 85-265V
 Beam angle: 15°/24°/36°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W

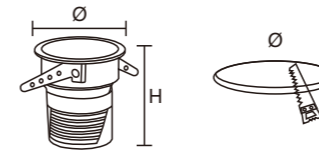

POWER	5-10W	8-12W
SIZE	Ø83*H83mm	Ø83*H98mm
CUT-OUT	Ø75mm	Ø75mm

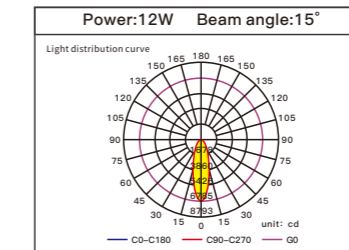

H(m)	EO(x)	Dh/DV_B(m)	S_B(sq.m)	Ear_B(x)
1.0m	4707.85	0.26/0.26	0.2	1278.93
2.0m	1178.96	0.51/0.52	0.3	569.73
3.0m	523.87	0.77/0.78	0.5	253.44
4.0m	294.49	1.03/1.04	0.9	142.68
5.0m	188.15	1.28/1.30	1.3	91.64

Half-peak corner(B):H14.6/V14.9
 Effective beam angle(F):H41.9 V42.1



Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.

Wall washer series

In order to achieve a uniform and comfortable ideal lighting effect on the entire wall, professionally developed an innovative optical system with excellent light output and effective glare protection. The use of highly reflective aluminum light cups can be perfectly integrated with indoor buildings. It is a commercial environment that pursues uniform washing. Ideal product for wall lighting.



Model:PXQD-017

TECHNICAL PARAMETER

Power: 5-7W/10-12W/20-25W/30-35W

Light source: COB

Ring color: Gun black/champagne gold/bright silver/bright black/sand black/sand silver/sand white

Ring shape: Small circle/ellipse

Voltage: 85-265V


Beam angle: 15°/24°/38°

Material: Aluminum



Color temperature: 3000K/4000K/6000K

Ra: Ra≥80

Lm: 90LM/W

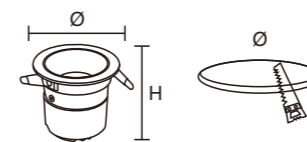

POWER	5-7W	10-12W	20-25W	30-35W
SIZE	Ø63*H63mm	Ø85*H76mm	Ø105*H99mm	Ø130*H115mm
CUT-OUT	Ø55mm	Ø75mm	Ø95mm	Ø120mm

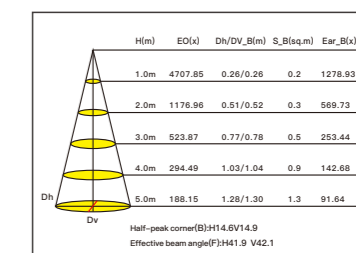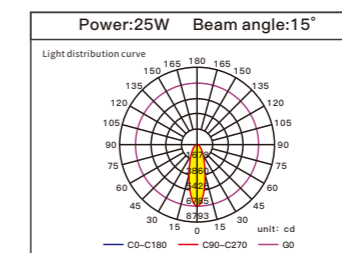



Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.



Model:YXQD-018

TECHNICAL PARAMETER

Power: 7W/12W/20W
 Light source: COB
 Ring color: White/bright silver/gun black/rose gold
 Ring shape: Small circle/ellipse
 Voltage: 85-265V
 Beam angle: 15°/24°/36°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W



H(m)	EO(x)	Dh/DV_B(m)	S_B(sq.m)	Ear_B(x)
1.0m	14313.85	0.32/0.32	0.1	6485.93
2.0m	3578.96	0.64/0.63	0.3	1621.73
3.0m	1590.87	0.96/0.95	0.7	720.44
4.0m	894.49	1.27/1.27	1.3	405.68
5.0m	572.15	1.59/1.58	2.0	259.64

Half-peak corner(B):H18.1V18.0
 Effective beam angle(F):H35.1 V35.4





Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.



Model:PXQD-019


TECHNICAL PARAMETER

Power: 5-7W/7-8W/10-12W/18-20W/20-25W
 Light source: COB
 Cup color: White/black/matte silver/matt black/gun black/bright silver/
 champagne gold/rose gold
 Voltage: 85-265V
 Beam angle: 15°/24°/38°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W

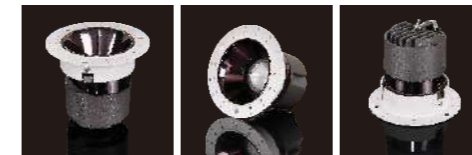


POWER	5-7W	7-8W	10-12W
SIZE	Ø80*H70mm	Ø100*H76mm	Ø100*H83mm
CUT-OUT	Ø55mm	Ø75mm	Ø75mm

POWER	18-20W	20-25W
SIZE	Ø100*H100mm	Ø125*H107mm
CUT-OUT	Ø75mm	Ø95mm



H(m)	EO(x)	Dh/DV_B(m)	S_B(sq.m)	Ear_B(x)
1.0m	14313.85	0.32/0.32	0.1	6485.93
2.0m	3578.96	0.64/0.63	0.3	1621.73
3.0m	1590.87	0.96/0.95	0.7	720.44
4.0m	894.49	1.27/1.27	1.3	405.68
5.0m	572.15	1.59/1.58	2.0	259.64

Half-peak corner(B):H18.1V18.0
 Effective beam angle(F):H35.1 V35.4

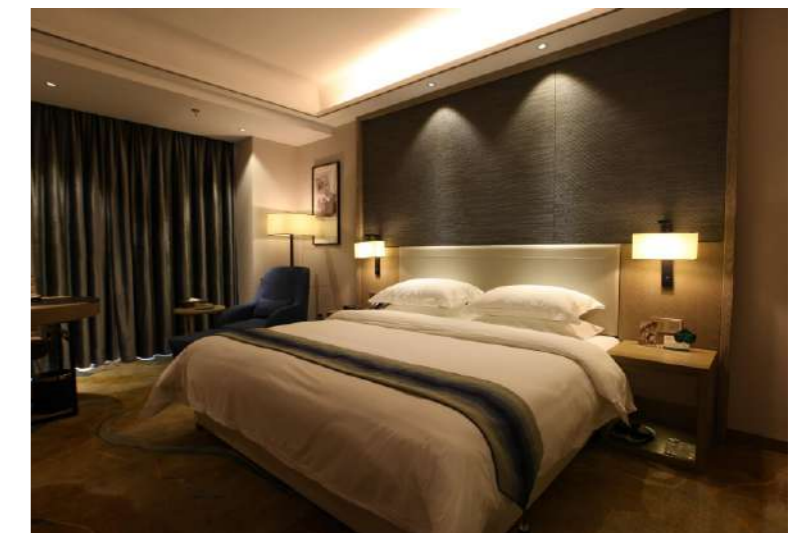


Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.





Model:PXQD-020

TECHNICAL PARAMETER

Power: 5-7W/7-8W/10-12W/18-20W/20-25W
 Light source: COB
 Cup color: White/black/matte silver/matt black/gun black/bright silver/
 champagne gold/rose gold
 Voltage: 85-265V
 Beam angle: 15°/24°/38°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W

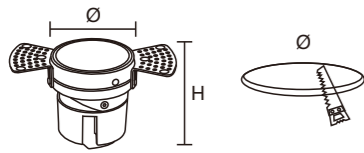

POWER	5-7W	7-8W	10-12W	18-20W	20-25W
HIGH	H70mm	H76mm	H83mm	H100mm	H107mm
CUT-OUT	Ø65mm	Ø85mm	Ø85mm	Ø85mm	Ø105mm

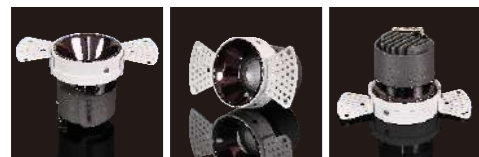

H(m)	EO(x)	Dh/DV,B(m)	S _B (sq.m)	Ear_B(x)
1.0m	4707.85	0.26/0.26	0.2	1278.93
2.0m	1176.96	0.51/0.52	0.3	569.73
3.0m	523.87	0.77/0.78	0.5	253.44
4.0m	294.49	1.03/1.04	0.9	142.68
5.0m	188.15	1.28/1.30	1.3	91.64

Half-peak corner(B):H14.6V14.9
 Effective beam angle(F):H41.9 V42.1




Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.





Model:PXQD-021

TECHNICAL PARAMETER

Power: 5-7W/7-12W/15-20W
 Light source: COB
 Ring color: White
 Voltage: 85-265V
 Beam angle: 15°/24°/36°
 Material: Aluminum
 Color temperature: 3000K/4000K/6000K
 Ra: Ra≥80
 Lm: 90LM/W



POWER	5-7W	7-12W	15-20W
SIZE	Ø68*H85mm	Ø90*H103mm	Ø110*H120mm
CUT-OUT	Ø55mm	Ø75mm	Ø95mm

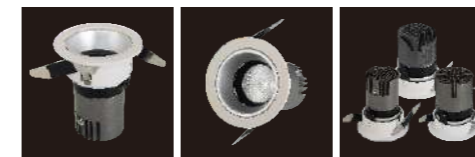

H(m)	EO(x)	Dh/DV,B(m)	S _B (sq.m)	Ear_B(x)
1.0m	4707.85	0.26/0.26	0.2	1278.93
2.0m	1176.96	0.51/0.52	0.3	569.73
3.0m	523.87	0.77/0.78	0.5	253.44
4.0m	294.49	1.03/1.04	0.9	142.68
5.0m	188.15	1.28/1.30	1.3	91.64

Half-peak corner(B):H14.6V14.9
 Effective beam angle(F):H41.9 V42.1



Scope of application: applicable to engineering projects such as star hotels, high-end clubs, villas, etc.

VORLANE 

WWW.VORLANE.COM

THANKS FOR WATCHING

WELCOME
TO call US

Mobile: 13925366726
Email : sales@vorlane.com